



Yuasa Technisches Datenblatt

Yuasa YBX5625 - Super Heavy Duty Battery

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung 12V
Kapazität 20 Std (vorgegeben) 230Ah
Kaltstartstrom (A) EN1 1350A

Abmessungen

Länge 516mm
Breite 274mm
Höhe 236mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 56.7kg



Gehäuseeigenschaften

Gehäusetyp DIN C
Zellenanordnung 3
Batteriehälter N
Ladezustandsanzeige ✓
Tragegriffe ✓
Deckeltyp SMF doppelwandige Deckelkonstruktion


Technologie

Technologie Ca/Ca
Empfohlener Ladestrom 12A
Performance Marking W3-C2-V4-M1

Anschlusspol Typ

T1


Standard DIN Post

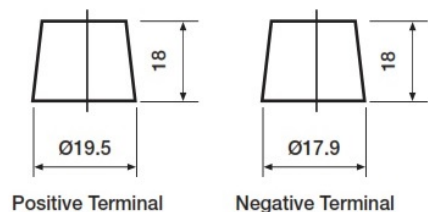

Positive Terminal

Negative Terminal

Zellenanordnung

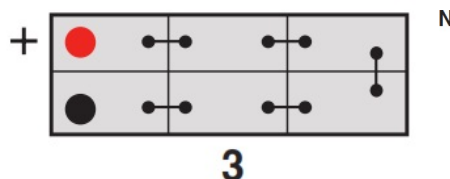

Batteriehälter



Datenblatt erstellt am 16/09/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX5625 - Super Heavy Duty Battery

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	230Ah
Cold Cranking Amps (EN1)	1350A

Dimensions

Length	516mm
Width	274mm
Height	236mm

Weights & Measures

Mean Weight with Acid	56.7kg
-----------------------	--------



Container Features

Case Type	DIN C
Cell Layout	3
Hold Down	N
State of Charge Indicator	✓
Handles	✓
Lid Type	SMF Double Lid


Technology

Technology	Ca/Ca
Recommended Charge Rate	12A
Performance Marking	W3-C2-V4-M1


Terminal Type

T1

Standard DIN Post

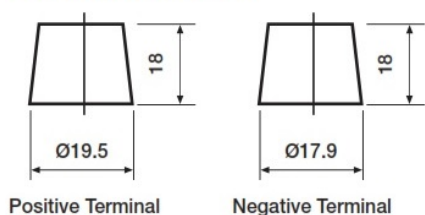

Cell Assembly Layout

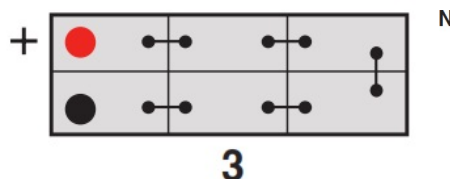

Battery Hold-down



Data Sheet generated on 16/09/2024 - E&OE