



Yuasa Technisches Datenblatt

Yuasa YBX1063 - YBX1000 CaCa Batterien

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung 12V
 Kapazität 20 Std (vorgegeben) 40Ah
 Kaltstartstrom (A) EN1 360A

Abmessungen

Länge 207mm
 Breite 175mm
 Höhe 175mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 11.4kg
 Säurevolumen 3 Liter



Gehäuseeigenschaften

Gehäusotyp LB1 DIN
 Batteriehalter B13/B14
 Ladezustandsanzeige ✓
 Tragegriffe ✓
 Entgasung ✓
 Deckeltyp Zentralentgasung


Technologie

Flammschutz ✓
 Technologie Ca/Ca
 Adskiller PE
 Empfohlener Ladestrom 2A
 Performance Marking W3-C2-V2-E1

Anschlusspol Typ

T1


Standard DIN Post

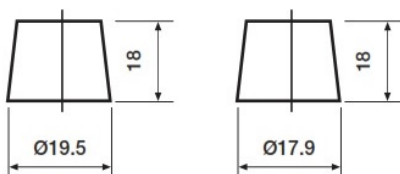

Positive Terminal


Negative Terminal

Zellenanordnung

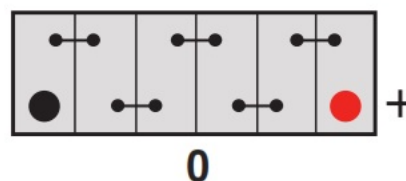

Batteriehalter

B3/B4 (B3 with Hold-Down adaptor)

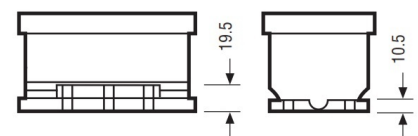

Datenblatt erstellt am 08/09/2020 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX1063 - YBX1000 CaCa Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 40Ah |
| Cold Cranking Amps (EN1) | 360A |

Dimensions

| | |
|--------|-------|
| Length | 207mm |
| Width | 175mm |
| Height | 175mm |

Weights & Measures

| | |
|-----------------------|----------|
| Mean Weight with Acid | 11.4kg |
| Acid Volume | 3 litres |



Container Features

| | |
|---------------------------|-----------------|
| Case Type | LB1 DIN |
| Hold Down | B13/B14 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | Central Venting |


Technology

| | |
|-------------------------|-------------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca |
| Separator | PE |
| Recommended Charge Rate | 2A |
| Performance Marking | W3-C2-V2-E1 |

Terminal Type

T1


Standard DIN Post

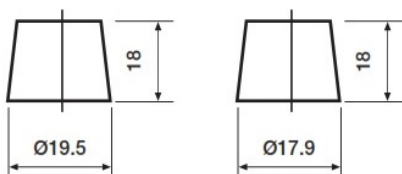

Positive Terminal


Negative Terminal

Cell Assembly Layout

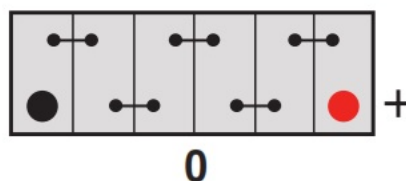

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

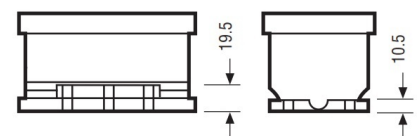

Data Sheet generated on 08/09/2020 - E&OE