



Yuasa Technisches Datenblatt

Yuasa YBX7027 - YBX7000 EFB Start Stop Plus Batterien

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	65Ah
Kaltstartstrom (A) EN1	600A

Abmessungen

Länge	242mm
Breite	175mm
Höhe	190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	16.6kg
--	--------



Gehäuseeigenschaften

Gehäusotyp	L2 DIN EFB
Anschlusspol Typ	T1
Batteriehälter	B3
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Deckeltyp	SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Adskiller	PE
VDA Überschlagentest	✓
Empfohlener Ladestrom	4A
Performance Marking	W3-C2-V3-M1

Anschlusspol Typ

T1


Standard DIN Post

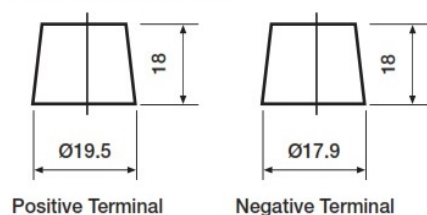


Positive Terminal

Negative Terminal

Zellenanordnung

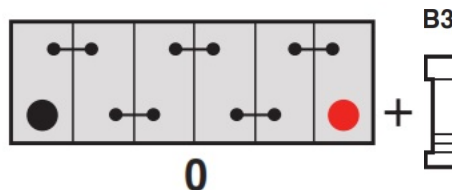

Batteriehälter

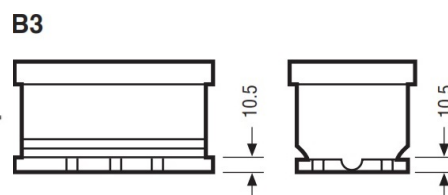

Datenblatt erstellt am 29/04/2025 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX7027 - YBX7000 EFB Start Stop Plus Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	65Ah
Cold Cranking Amps (EN1)	600A

Dimensions

Length	242mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	16.6kg
-----------------------	--------



Container Features

Case Type	L2 DIN EFB
Terminal Type	T1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W3-C2-V3-M1


Terminal Type

T1


Standard DIN Post

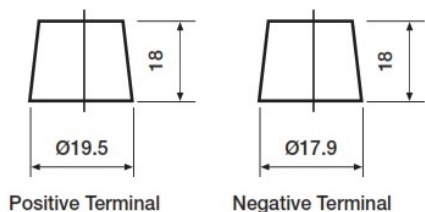

Cell Assembly Layout

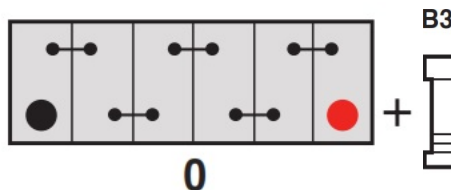

Battery Hold-down

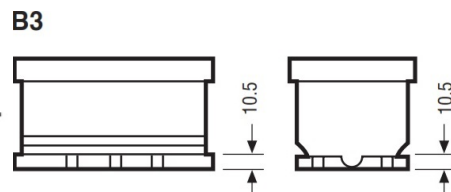

Data Sheet generated on 29/04/2025 - E&OE