


# EMERGENCY EXIT SIGN

M20

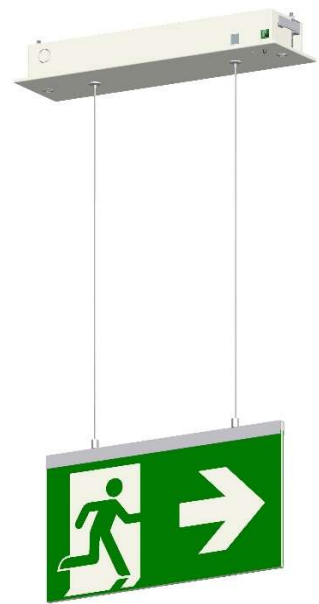


## Technical Data

Viewing distance	30 m	IP rating	IP 20
Mounting	Ceiling recessed wire suspension	IK rating	IK 06
Housing material	base: sheet metal, panel holder: aluminum	Light source	LED
Housing colour	base in white, panel holder in silver	Colour temperature	6500 K
Insulation class	I	Luminance	500 or 50 cd/m2, selectable

	Self-contained	Centrally supplied
Rated voltage	220-240 V AC, 50/60 Hz	220-240 V AC, 50/60 Hz 180-300 V DC
Rated wattage	3.1W (500 cd/m2), 0.5W (50 cd/m2)	3.8 W
Mode of operation	Maintained or non-maintained, selectable	Maintained
Emergency duration	1/2/3/8 h, selectable	-
Battery	LiFePO4 3.2 V/1.5 Ah	Central battery
Test system	Automatic, manual	-
Ambient temp.	0 °C to +40 °C	-10 °C to +40 °C

## Dimensions

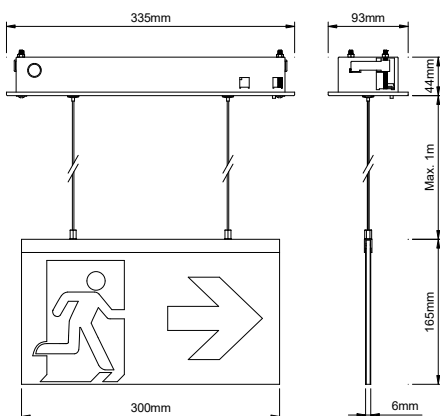

Article number	Type	Weight
M20001	M20-30 LFP Self-contained	1.29 kg
M20002	M20-30 CS Central battery	1.24 kg