




**-Instant Installation, Rapid Multi-Directional Adjustment,
Seamless Tolerance Adaptation.**




Item	Data (mm)	Item	Data (mm)
a	40.7-54.7	e	100
b	115	f	30
c	122.3-136.2	g	27
d	89		

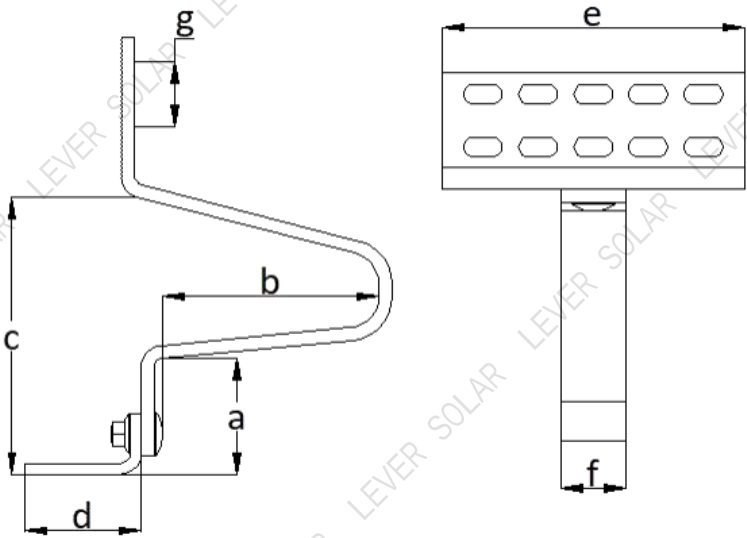


NE1991-1-4	-	Max wind speed: 35m/s ;	Snow Load : 3.0Kn/m2
------------	---	-------------------------	----------------------

No	Description	Material	Remark
1	Tile Hook 3010509 ×1	Aluminum 6005-T5	Pre-assemble
2	Rail fastener 3010152 ×1	Aluminum 6005-T5	
3	Torx head wooden screw (M8*80 /M8*100) TX40 ×2	SS304	/

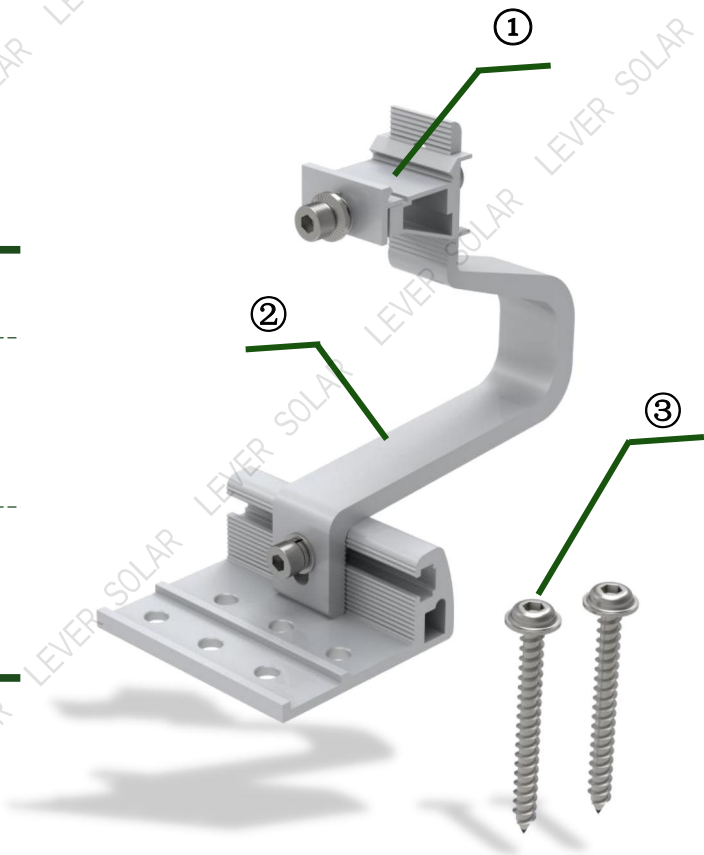



Why choose our products

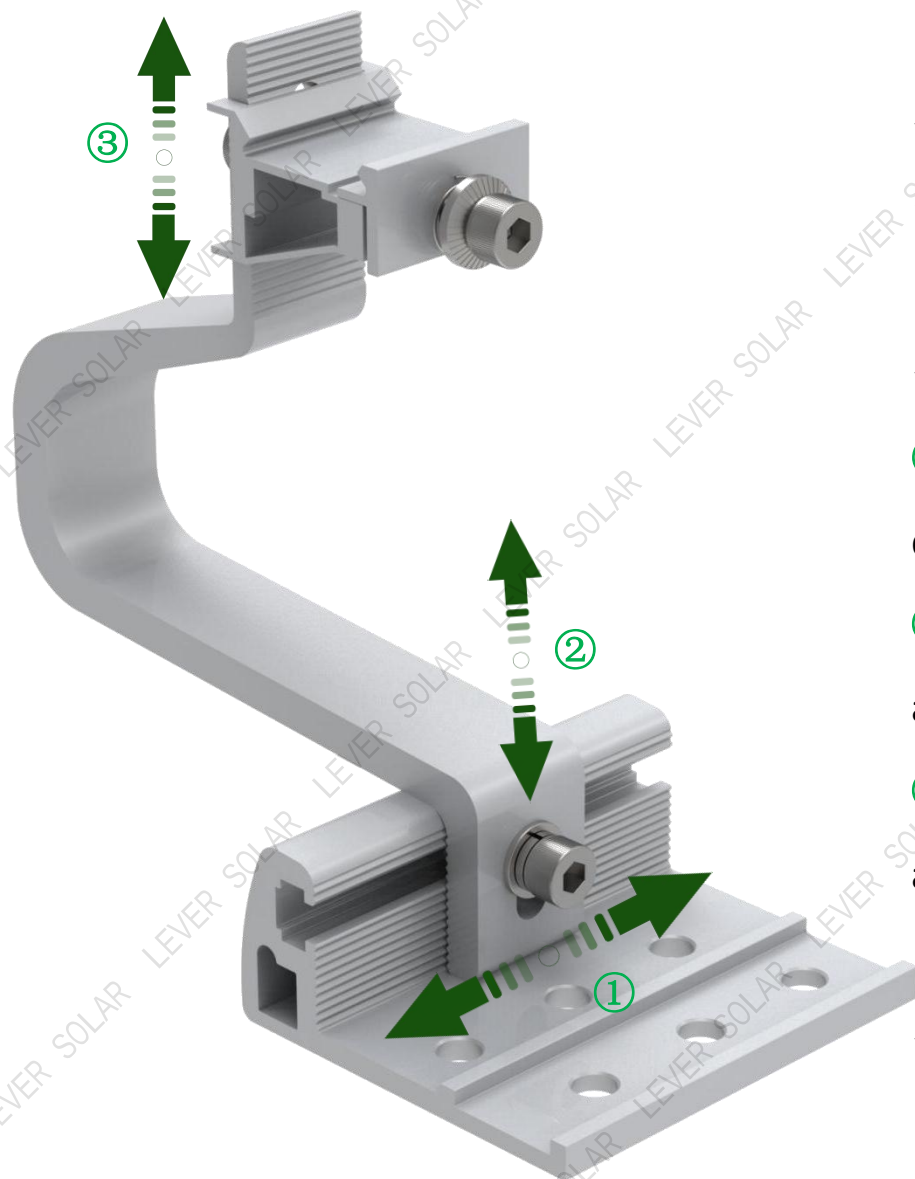

- ◆ One-Step Snap-in Installation , Completed quickly within 1 second
- ◆ The hook has already been pre-assembled at the LEVER SOLAR factory. 30% of the pre-assembly is complete, facilitating quick installation
- ◆ Bolts are standardized, and a single tool is sufficient for installation
- ◆ **Multi-directional adjustable**
 - ① Use this adjustment point to accommodate positional deviations in wooden beams for easier installation.
 - ② When the tile height is higher or lower, this point can be adjusted to adapt to different heights
 - ③ The rails can be adjusted left and right & up and down to adjust and reduce errors caused by rail installation or uneven roof surfaces
- ◆ Equipped with multiple certificates and offering a 15-year warranty.



Package

- The pallets have been treated with ISPM-15 phytosanitary treatment.
- Minimize the use of plastic packaging to avoid plastic taxes;
- CBAM report on carbon tariffs

No	Items	Pcs / Ctn	Ctn/ Pallet	Qty / Pallet	Remark
1	Aluminum tile Hook 3010509	10	45	450	Brown corrugated carton /Customized carton
2	Rail fastener 3010152	10			
3	Torx 40 screw 1830491- (M8*80 / M8*100)	20			

