


Type Designation	CR 123 A
Designation IEC	CR 17345
System	Li-MnO ₂
Shelf Life *	10 years
Nominal Voltage [V]	3
Typical Capacity C [mAh]	1430
Permissible Temperature Range	- 20 °C ... 60 °C
Weight, approx. [g]	16
Volume [ccm]	7.5
Dimensions [mm]	min: max:

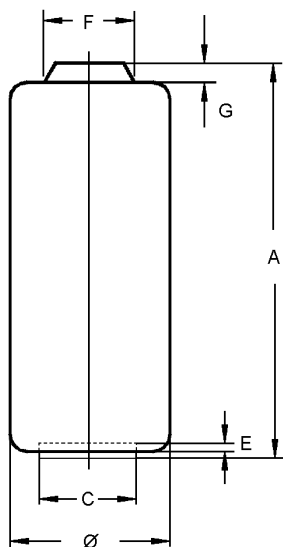

Ø	16.0	17.0
A	33.5	34.5
C	11.0	11.5
E	0.5	0.9
F	5.9	6.1
G	1.0	1.2

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage[V]	1,55
Photo	900 mA	Time [cy]	1660
3s/30s, 24h/d		Capacity [Ah]	1.245
		Energy [Wh]	3.0
Discharge Type	Load	End Voltage[V]	2.0
Service Output Test	100 Ω	Time [h]	51.0
24h/d, 7d/w		Capacity [Ah]	1.43
		Energy [Wh]	3.92

* In consideration of typical loss of capacity at storage and application.

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries