



## Yuasa Technisches Datenblatt

### Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batterien

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Leistung

Spannung 12V  
 Kapazität 20 Std (vorgegeben) 80Ah  
 Kaltstartstrom (A) EN1 800A

#### Abmessungen

Länge 317mm  
 Breite 175mm  
 Höhe 190mm

#### Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 23.2kg



#### Gehäuseeigenschaften

Gehäusotyp L4 DIN AGM  
 Batteriehalter B3  
 Tragegriffe ✓  
 Entgasung ✓  
 Semi Traktionseigenschaften ✓  
 Deckeltyp VRLA


#### Technologie

Flammschutz ✓  
 Technologie Ca/Ca VRLA  
 Adskiller AGMSORTIMENT  
 VDA Überschlagentest ✓  
 Empfohlener Ladestrom 5A  
 Performance Marking W5-C2-V3-M3

#### Anschlusspol Typ

##### T1


Standard DIN Post

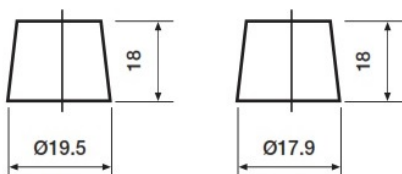


Positive Terminal

Negative Terminal

#### Zellenanordnung

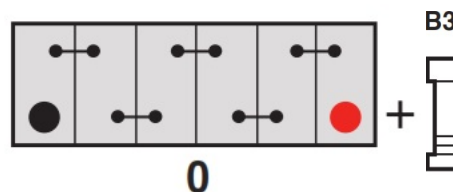

#### Batteriehalter

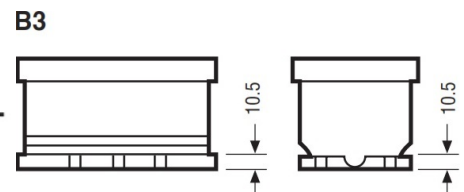

Datenblatt erstellt am 08/09/2020 - E&EO





## Yuasa Technical Data Sheet

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

### Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	80Ah
Cold Cranking Amps (EN1)	800A

#### Dimensions

Length	317mm
Width	175mm
Height	190mm

#### Weights & Measures

Mean Weight with Acid	23.2kg
-----------------------	--------



#### Container Features

Case Type	L4 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


#### Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA
VDA Roll Over Test	AGM
Recommended Charge Rate	✓
Performance Marking	5A
	W5-C2-V3-M3

#### Terminal Type

##### T1


Standard DIN Post

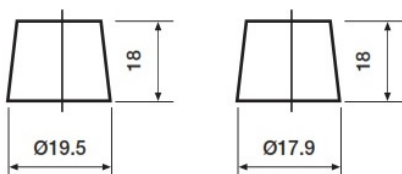


Positive Terminal

Negative Terminal

#### Cell Assembly Layout

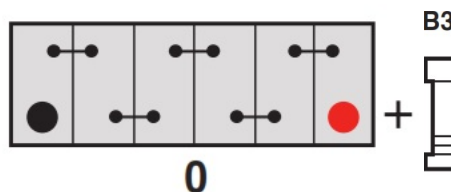

#### Battery Hold-down

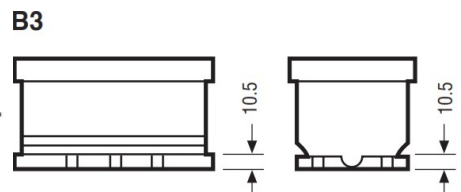

Data Sheet generated on 08/09/2020 - E&OE

