






*–Installs in seconds, available in multiple colors,
accommodates a range of panel thicknesses.*

Solar panels with a thickness between 30 and 40 mm are universal


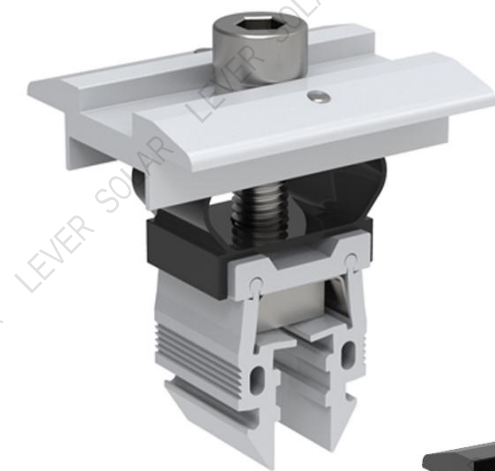


Mid clamp

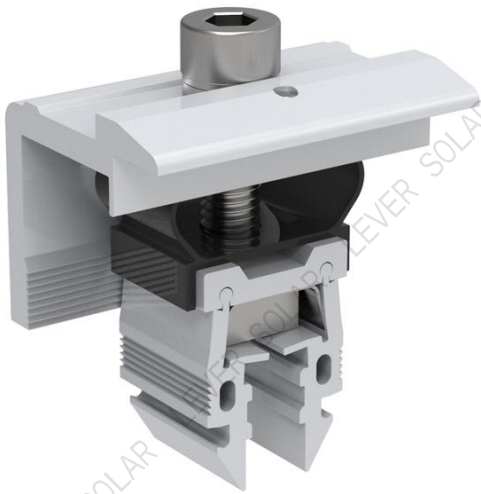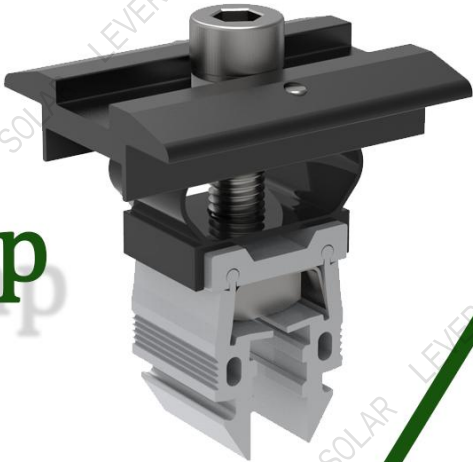

End clamp

Item	Data (mm)	Item	Data (mm)
a	50	d	50
b	41	e	36
c	4	f	32.5
		g	4

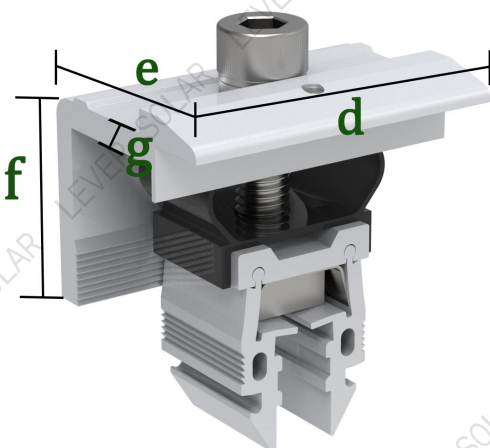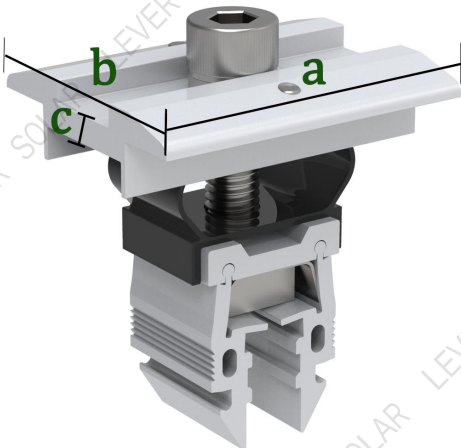


No	Description	Material	Color
1	Mid clamp	Aluminum 6005-T5 & Anodized	Silver/Black/Red
2	End clamp	Aluminum 6005-T5 & Anodized	





Why choose our products

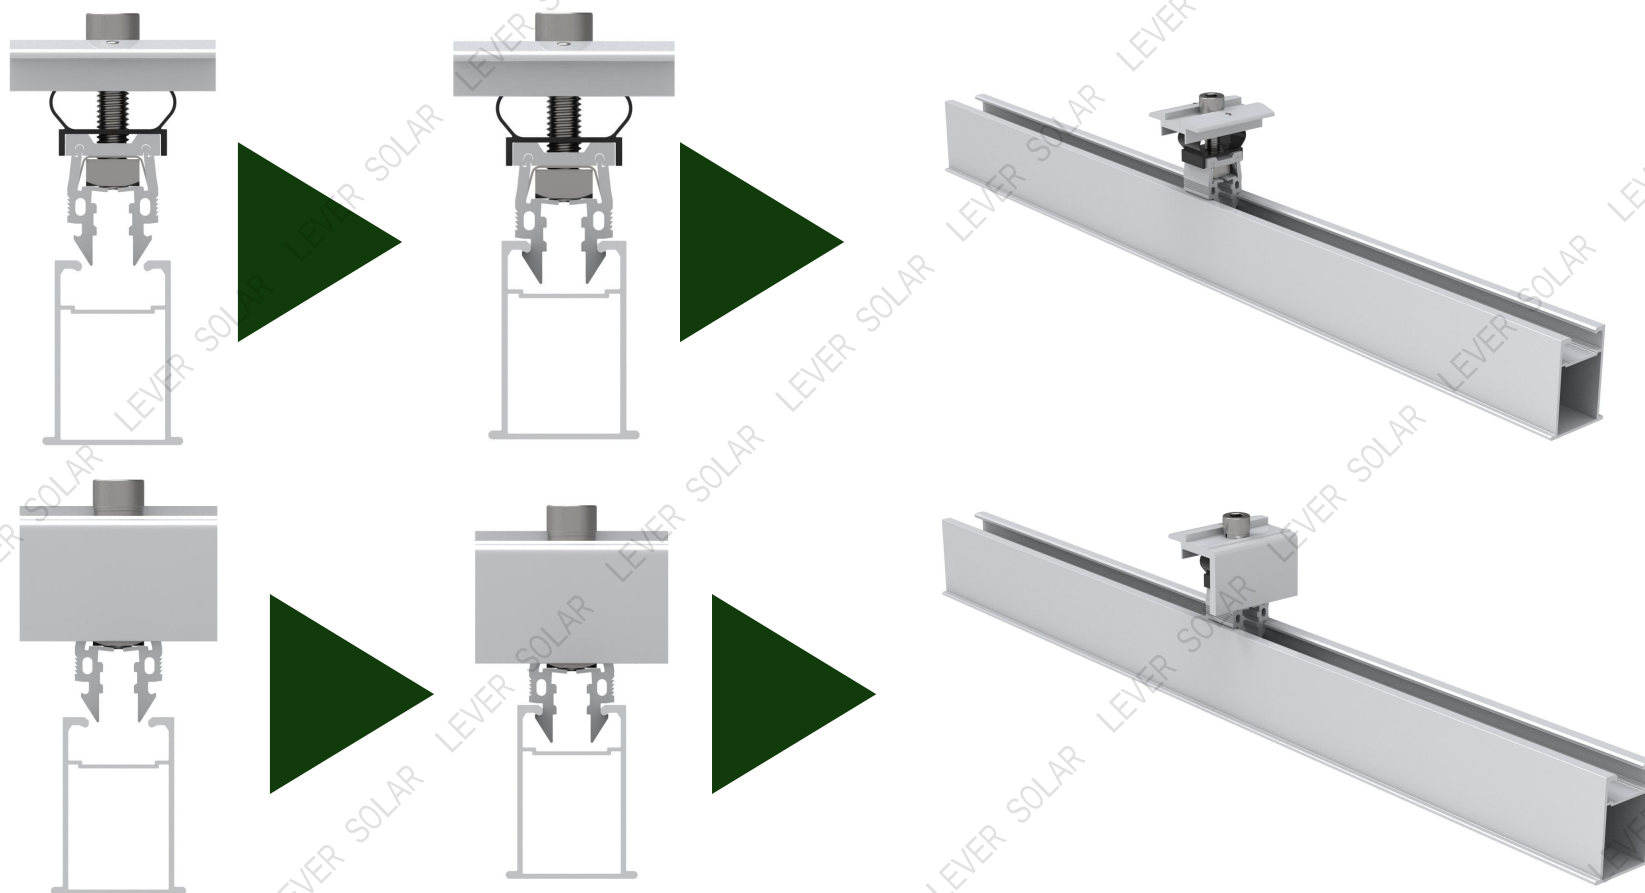

- ◆ One-Step Snap-in Installation, Completed quickly within 1 seconds
- ◆ The panel thickness is between 30mm ~ 40mm, the panel clamp is universal
- ◆ The grounding nails can penetrate the film on the solar panel frame to achieve lightning conduction.
- ◆ The Panel clamp is equipped with stainless steel square nuts. When installed on rails, even on steep roofs, there's no need to worry about it sliding down.
- ◆ Equipped with multiple certificates and offering a 15-year warranty.



Package

- The pallets have been treated with ISPM-15 phytosanitary treatment.
- Minimize the use of plastic packaging to avoid plastic taxes;
- CBAM report on carbon tariffs



No	Items	Pcs / Box	Box / Ctn	Ctn/ Pallet	Qty / Pallet	Remark
1	Mid clamp ×1	16	9	45	6480	Brown corrugated carton /Customized carton
2	End clamp ×1	16	9	45	6480	

