


# XCELL XCELFP1218

## 12.8V 18Ah



### Dimension:

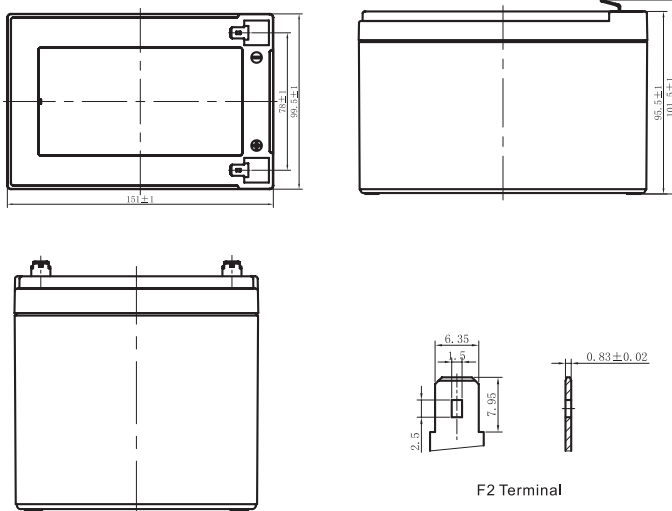

Unit: mm

### SAFETY

- + Cylindrical LiFePO<sub>4</sub> cells (32700-6Ah), High consistency, long cycle life and much more safety.
- + UN38.3, CE certification for system.
- + The cycle life over 2000 times @80%DOD

### DESIGN

- + ABS container, replace VRLA battery perfectly.
- + Fast charge performance.
- + -20~ +55° C widely temperature range.
- + Maintenance free.

### BATTERY MANAGEMENT SYSTEM (BMS)

- + Integrated hardware BMS inside.
- + Independent protection for charge and discharge.
- + Over voltage, low voltage, over temperature and short circuit protection.



# XCELL XCELFP1218

## 12.8 V 18 Ah

### Specification

Model	R-LFP12.8V18Ah
Part Number	XCELFP1218
Nominal Voltage [V]	12.8
Nominal Capacity [Ah]	18
Total Energy [Wh]	230.4
Max. Charging Current [A]	18
Recommended Charging Current [A]	9
Charging Voltage [V]	14.6
Max. Discharging Current [A]	18
End of Discharge Voltage [V]	11.2
Pulse Discharge Current	50A @ 10s
Dimension [W*D*H, mm]	151*98*95
Weight [Kg]	1.96
Operation Humidity	0~95% RH (No condensing)
Operating Temperature Range	Charge: 0 ~ +50 °C; Discharge: -20 ~ +55 °C
BMS Protection	Over charge Over discharge, Over temperature, Short circuit
Parallel Support	Yes, Max 2 Sets
Series Support	Yes, Max 4 Sets
Cycle Life	>2000
Designed Calendar Life	>10 Years
Certification	UN38.3, CE, MSDS

Note:

1. 80% DOD and to 80% of initial capacity.