


CR2016

Model	CR2016
System	Manganese dioxide–Li/Organic Electrolyte
Nominal Voltage (V)	3
Nominal Capacity (mAh)*	90
Nominal Discharge Current (mA)	0.1
Weight (g)**	1.7
Dimensions (mm)**	
Diameter	20.0
Height	1.6
UL Recognition	MH12568

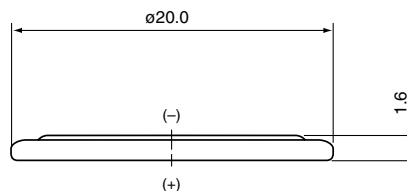


Available Terminals and Wire Connectors


None, bulk only.

Characteristics


● Discharge Characteristics

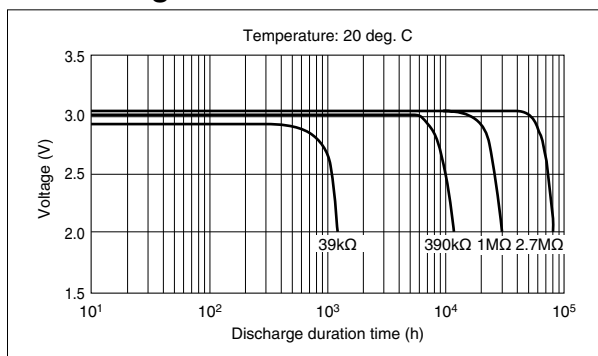


● Temperature Characteristics

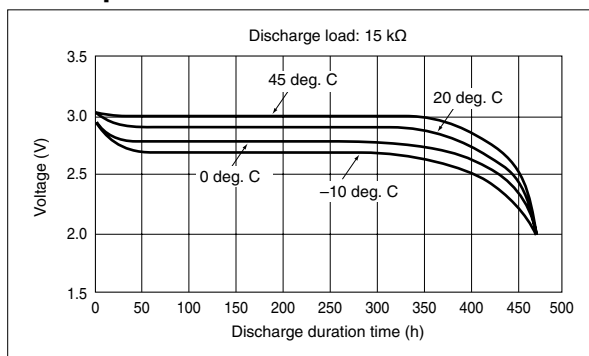

● Pulse Discharge Characteristics

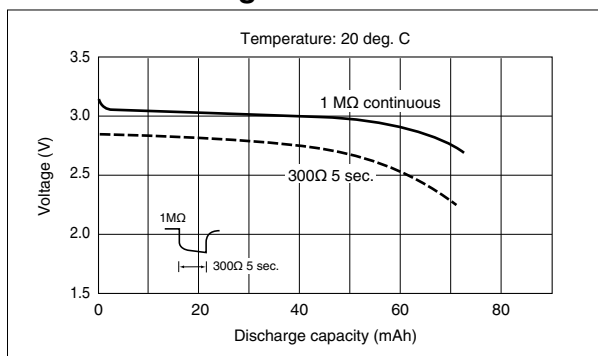

● Relationship between Discharge Current and Discharge Capacity

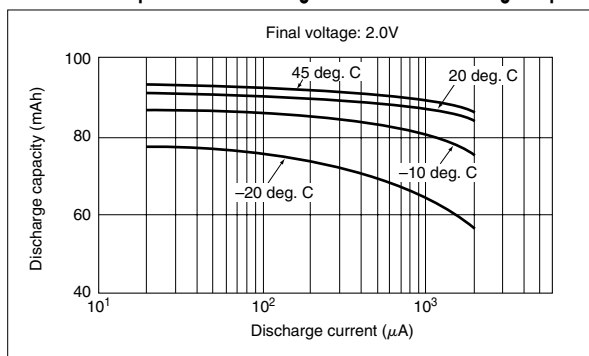

* Nominal capacity indicates duration until the voltage drops down to 2.0V when discharged at a nominal discharge current at 20 deg. C.

** Dimensions and weight are for the battery itself, but may vary depending on the shape of terminals or other factors.