



## Yuasa Technisches Datenblatt

### Yuasa YBX3063 - YBX3000 SMF Batterien

#### Leistung

|                               |      |
|-------------------------------|------|
| Spannung                      | 12V  |
| Kapazität 20 Std (vorgegeben) | 45Ah |
| Kaltstartstrom (A) EN1        | 425A |

#### Abmessungen

|        |       |
|--------|-------|
| Länge  | 207mm |
| Breite | 175mm |
| Höhe   | 175mm |

#### Maße und Gewichte

|  |        |
|--|--------|
| Durchschnittliches Gewicht inkl. Säure | 11.5kg |
| Gewicht (trocken)                      | -      |
| Säure Volumen                          | -      |



#### Gehäuseeigenschaften

|                             |                                      |
|-----------------------------|--------------------------------------|
| Gehäusotyp                  | LB1 DIN                              |
| Batteriehälter              | B3/B4                                |
| Ladezustandsanzeige         | ✓                                    |
| Tragegriffe                 | ✓                                    |
| Entgasung                   | ✓                                    |
| Semi Traktionseigenschaften | -                                    |
| Deckel Typ                  | SMF doppelwandige Deckelkonstruktion |


#### Technologie

|                   |       |
|-------------------|-------|
| Flammschutz       | ✓     |
| Technologie       | Ca/Ca |
| Separator         | PE    |
| VDA Überroll Test | ✓     |
| Ladestrom         | 3A    |


#### Anschlusspol Typ

##### T1

Standard DIN Post

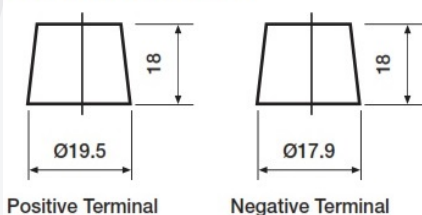


#### Zellenanordnung

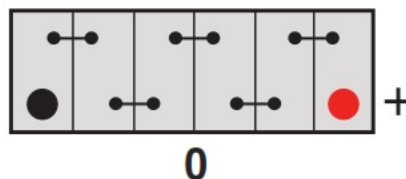

#### Batteriehälter

B3/B4 (B3 with Hold-Down adaptor)

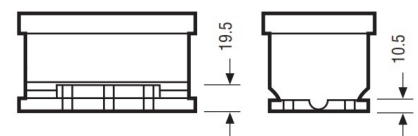

Ausstellungsdatum: 23/01/2019 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX3063 - YBX3000 SMF Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 45Ah |
| Cold Cranking Amps (EN1) | 425A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 207mm |
| Width  | 175mm |
| Height | 175mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 11.5kg |
| Dry Weight            | -      |
| Acid Volume           | -      |



#### Container Features

|                           |                |
|---------------------------|----------------|
| Case Type                 | LB1 DIN        |
| Hold Down                 | B3/B4          |
| State of Charge Indicator | ✓              |
| Handles                   | ✓              |
| End Venting               | ✓              |
| Semi-Traction Features    | -              |
| Lid Type                  | SMF Double Lid |

#### Technology

|                         |       |
|-------------------------|-------|
| Flame Arrestor          | ✓     |
| Technology              | Ca/Ca |
| Separator               | PE    |
| VDA Roll Over Test      | ✓     |
| Recommended Charge Rate | 3A    |

#### Terminal Type

##### T1


Standard DIN Post



Positive Terminal


Negative Terminal

#### Cell Assembly Layout

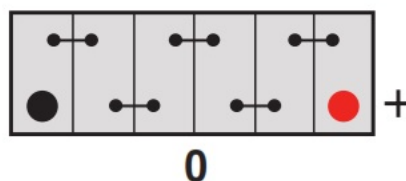

#### Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

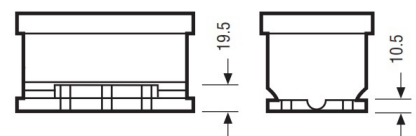

Data Sheet generated on 23/01/2019 - E&OE